

proRZ-Outdoor Container – DCOR

proRZ-Outdoor Container (proRZ-DCOR)



Product features **proRZ-DCOR (1)**

- Designed and developed for the temporary use of IT systems
- Energy-efficient turn-key solution
- Mobile Data Centre for the indoor- and outdoor installation
- Relocations if and when required
- Equipment:
Free-cooling systems, fire extinguishing systems, monitoring systems, raised floors, power and emergency power supplies ...


Product features **proRZ-DCOR (2)**

- Available in all RAL colour tones
- Fire resistance class acc. to DIN 4102 , F30 up to F90
- Burglar protection WK II acc. To EN 1627, door system WK I
- Protection against dust and fire fighting water
- Smoke protection
- Protection against wind-driven rain
- EMP protection



System components for proRZ-DCOR


- T90 IT-door system with mechanical or electronic lock
- Hard cable duct system on top or at the bottom
- Option: Rain cover above the door

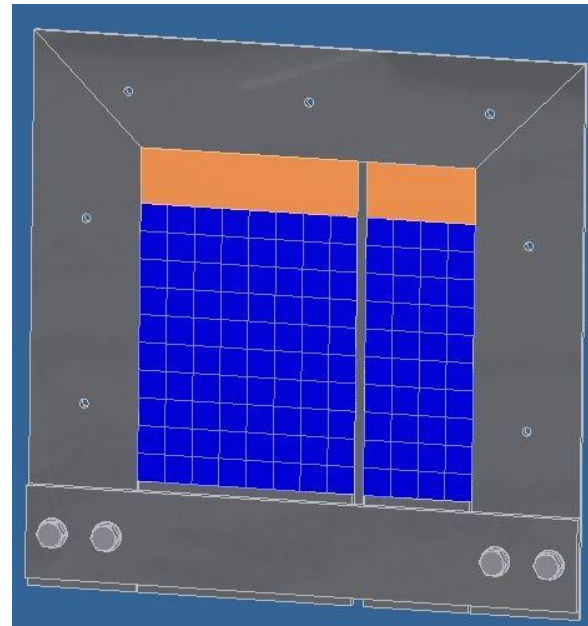

Technical data for standard Outdoor Container F 30 (Individual dimensions possible!)

- Type: **proRZ-DCOR**
- Outer dimensions: (H x W x D): 3210 x 6040 x 3000 mm
- Usable dimensions (H x W x D): 2775 x 5776 x 2736 mm
- Usable floor space : 15,8 m²
- Fire resistance class acc. to DIN 4102, F30.
- Burglar protection acc. to EN 1627: WK II, door system WK III

Example: proRZ-DCOR 1

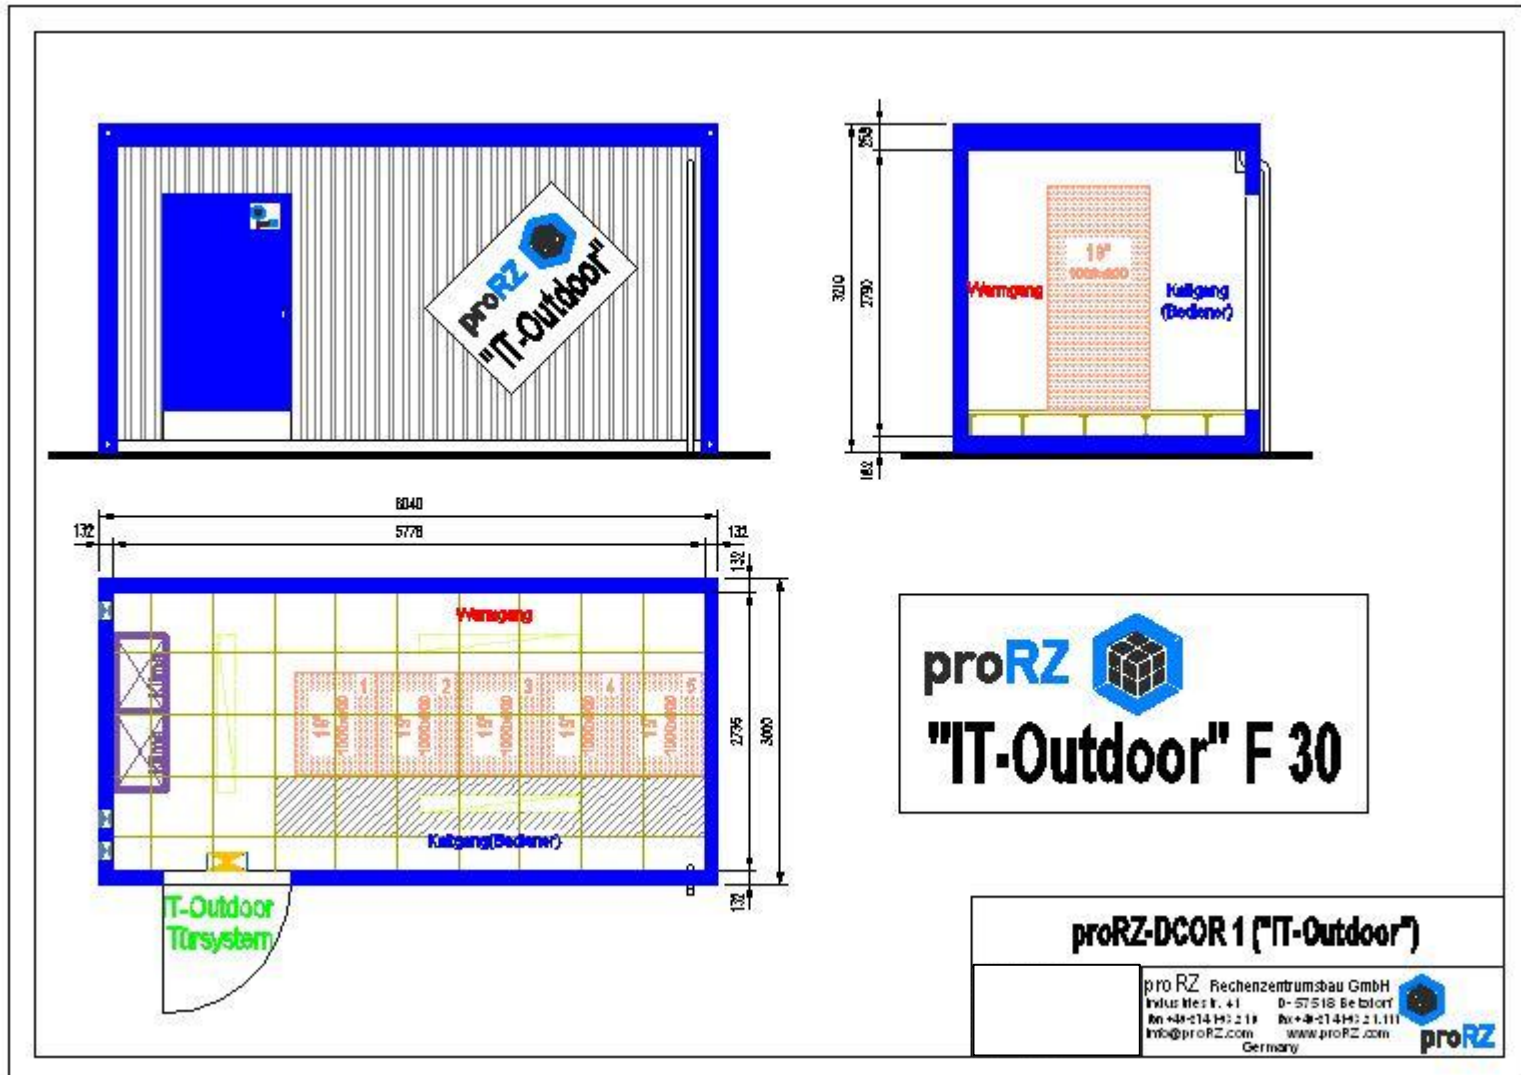


Technical data for standard Outdoor Container F 30 (Individual dimensions possible!)

Type: proRZ-DCOR 2

- Outer dimensions (H x W x D): 3210 x 6040 x 3000 mm
- Usable dimensions (H x W x D): 2775 x 5746 x 2706 mm
- Usable floor space: 15,4 m²
- Fire protection class acc. to DIN 4102: F90
- Burglar protection acc. to EN 1627: WK II, door system WK III

Example: proRZ-DCOR 2

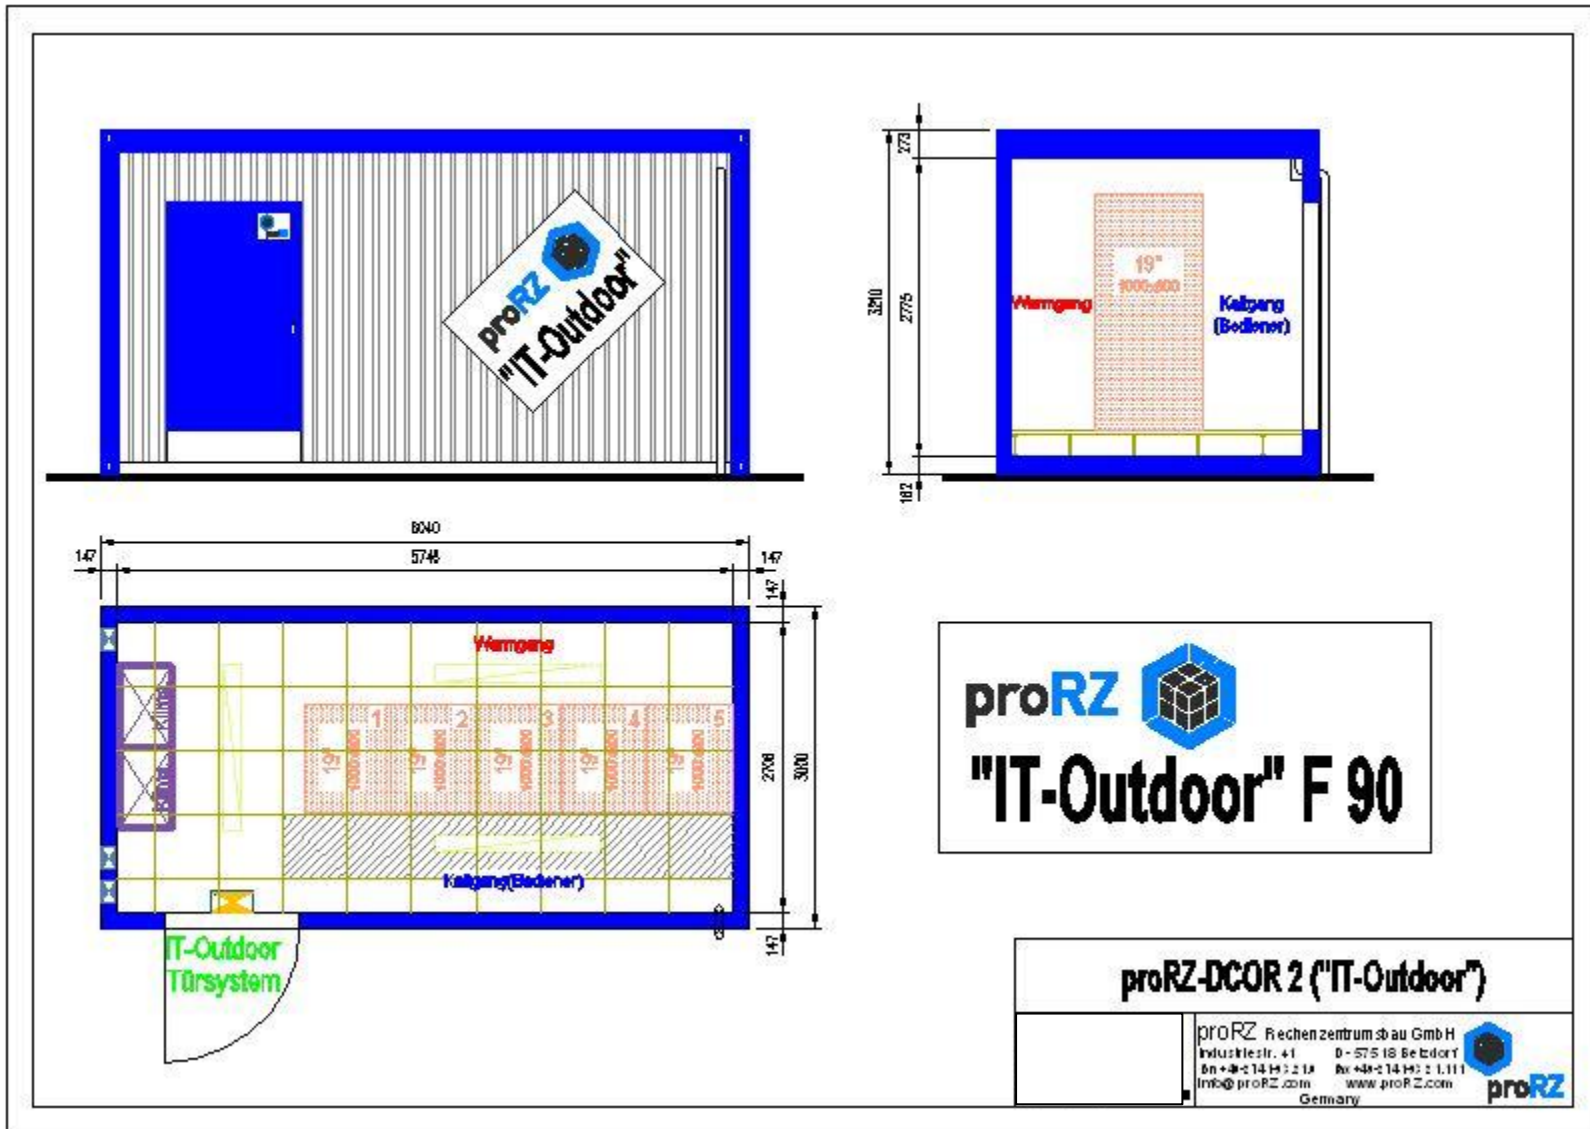


References

Type: **proRZ-DCOR 2**

- Outer dimensions (H x W x D): 3210 x 8500 x 5300 mm
- Usable dimensions (H x W x D): 2775 x 8206 x 5006 mm
- Usable floor space: 41 m²
- Height of raised floor 300 mm
- Technical area separated from IT area
- Door systems with electronic lock and access control
- Delivery time: 6 weeks after receipt of order

References

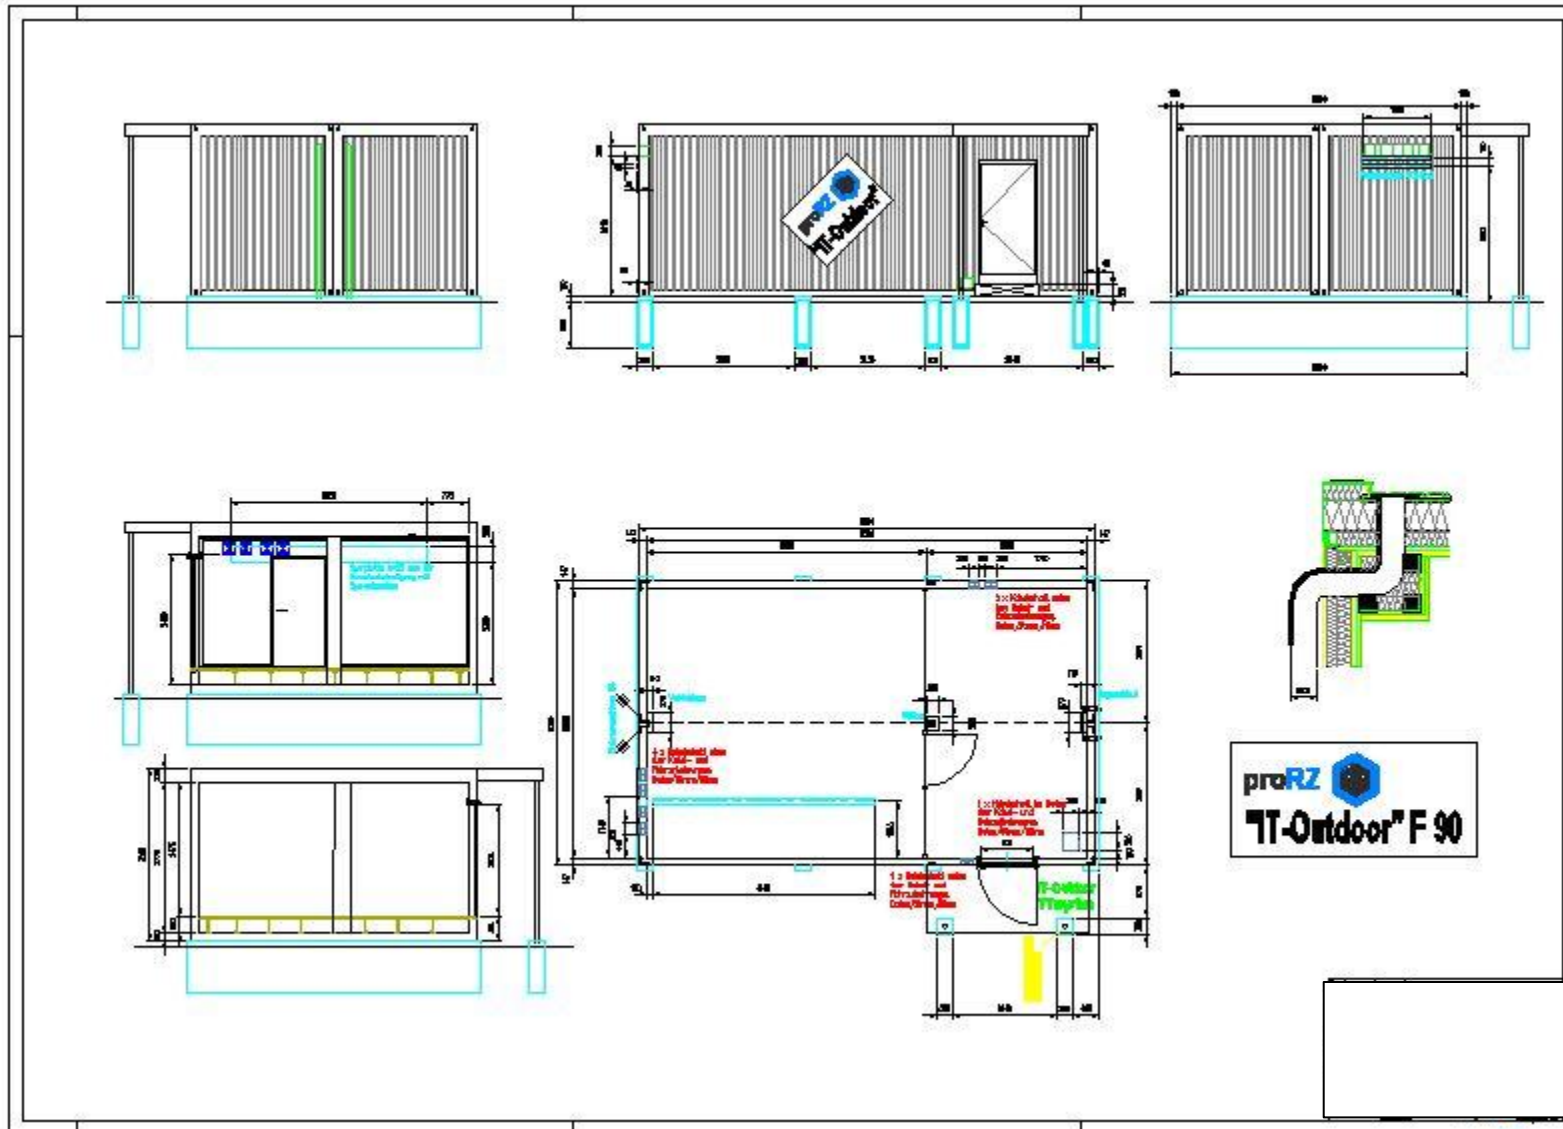

References



References



References



References



References



References



References



References



References



References



References



References



References



References



References



References



References



References

